



# Analysis of energy use in Italian fishing vessels

Antonello Sala

National Research Council – Institute of Marine Sciences (CNR-ISMAR)  
Ancona (Italy)

[www.ismar.cnr.it](http://www.ismar.cnr.it) - [a.sala@ismar.cnr.it](mailto:a.sala@ismar.cnr.it)

Tel. +39 (071) 2078841

## Rationale: crisis of fishing industry

Main factors affecting fishing industry	Influence on fishing activities
<ul style="list-style-type: none"><li>➤ Overfishing</li><li>➤ World economic crisis (fishermen do not have any influence in the market)</li></ul>	<b>Revenue</b>
<ul style="list-style-type: none"><li>➤ Increasing in fuel price</li><li>➤ Fishing vessels not efficient usually because of outdated technology</li></ul>	<b>Costs</b>

Profitability Index

$$I = \frac{\text{Revenue}}{\text{Costs}}$$

Management costs:

<b>Fuel</b>	<b>55%</b>
Crew	30%
Maintenance	10%
Other	5%

- ✓ European Commission restrictions related to the actual overfishing;
- ✓ impossible to fish more;
- ✓ fishermen do not have influences on the market prices;

**A possible solution is to reduce running costs by reducing fuel consumption**

# Definition of Energy Audit

---

## Regulatory references

- ✓ *Council Regulation (EC) Nr. **2371/2002**, Art. 33: “Conservation and sustainable exploitation of fisheries”;*
- ✓ *Council Regulation (EC) Nr. **744/2008** del 24/07/2008: “A Community contribution should also be provided for collective actions aimed at delivering expertise to vessel owners in relation to **energy audits** for vessels”.*

***Energy audit is a systematic approach to evaluate energy consumption in fisheries.***

## Objectives

- to define the energetic profile of the fishing vessel through energy indicators;
- to identify technological improvements;
- to evaluate technical and economical benefits of improvements.


- 1. Preliminary investigation and inspection of fishing vessel;**
- 2. installation of the instrumentations on board of fishing vessel;**
- 3. sea trials during commercial cruises;**
- 4. data post-processing;**
- 5. evaluation of energy performance indicators;**
- 6. evaluation of energy profiles obtained.**

## Measurement system: instrumentation installed

---

<b>Instrumentation</b>	<b>Parameter</b>
<b>Fuel flow meters</b>	<b>Fuel consumption</b>
<b>Torque meter and shaft RPM counter</b>	<b>Delivered power</b>
<b>Oil flow and pressure meter</b>	<b>Hydraulic power</b>
<b>Ammeter claws</b>	<b>Electric power</b>
<b>Strain gauges</b>	<b>Gear drag</b>
<b>GPS</b>	<b>Position, course, speed</b>
<b>Gear monitoring system</b>	<b>Trawl geometry</b>





# Measurement system: data acquisition software

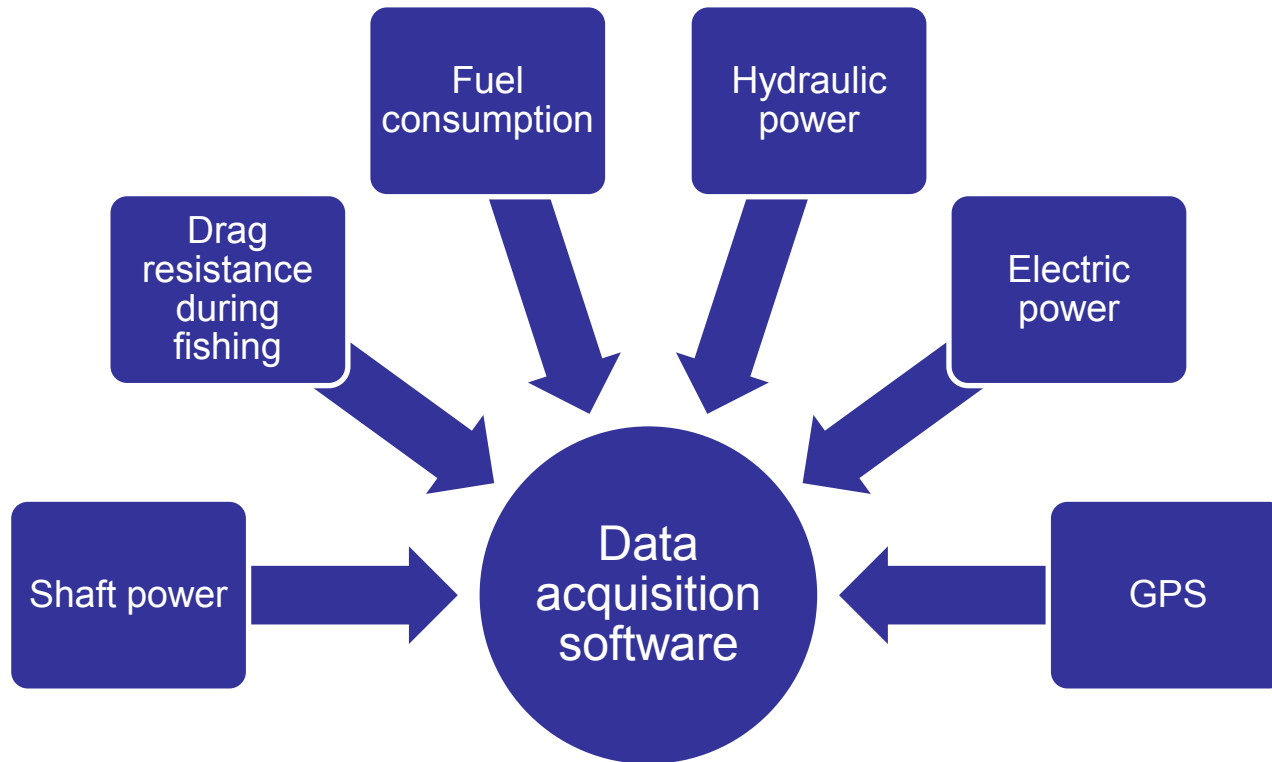

## Data acquisition system conceived at CNR-ISMAR


- Post-processing and data synchronization;
- Control of the correct functioning of the acquisition;
- Data recording rate of 5 seconds.

# Measurement system: acoustic flow meters

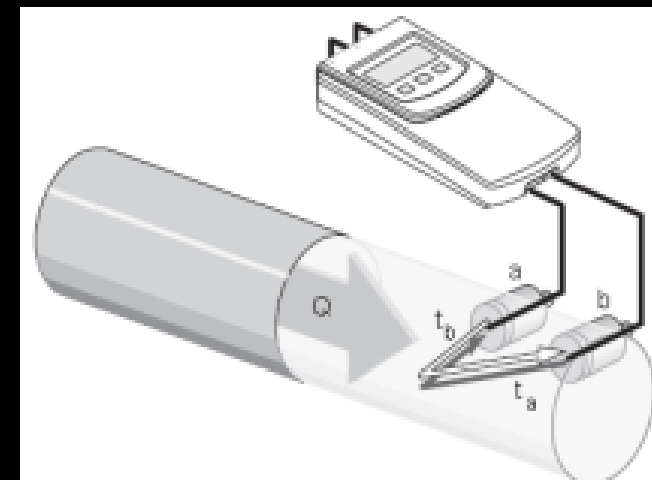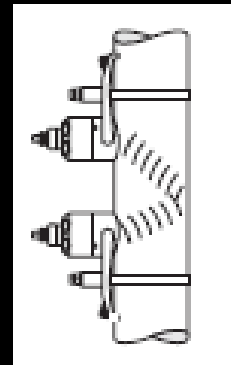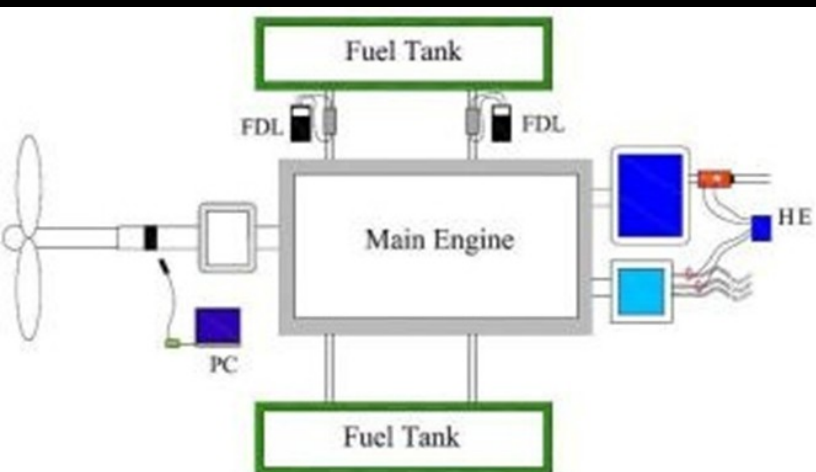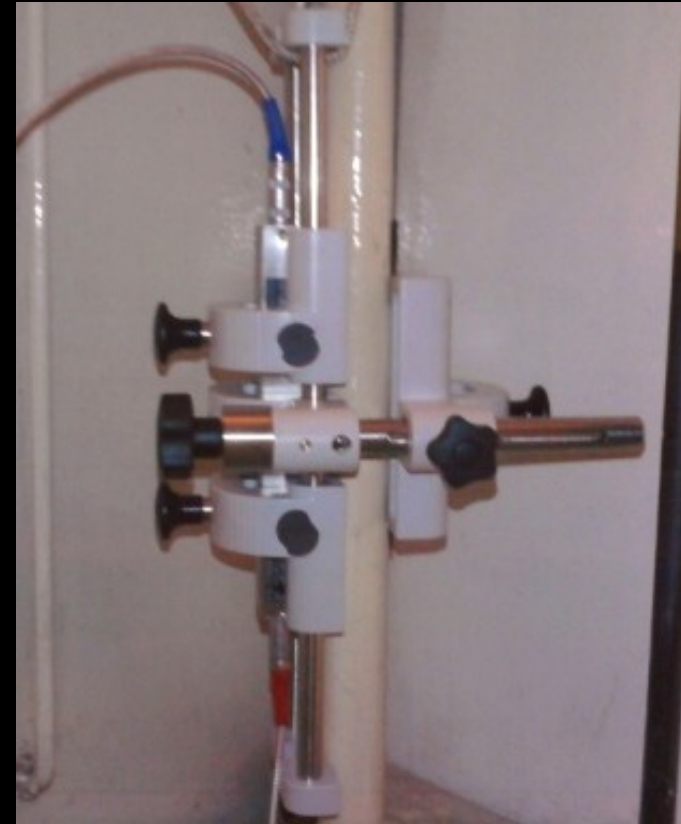

# Measurement system: torque meter

Strain gauge

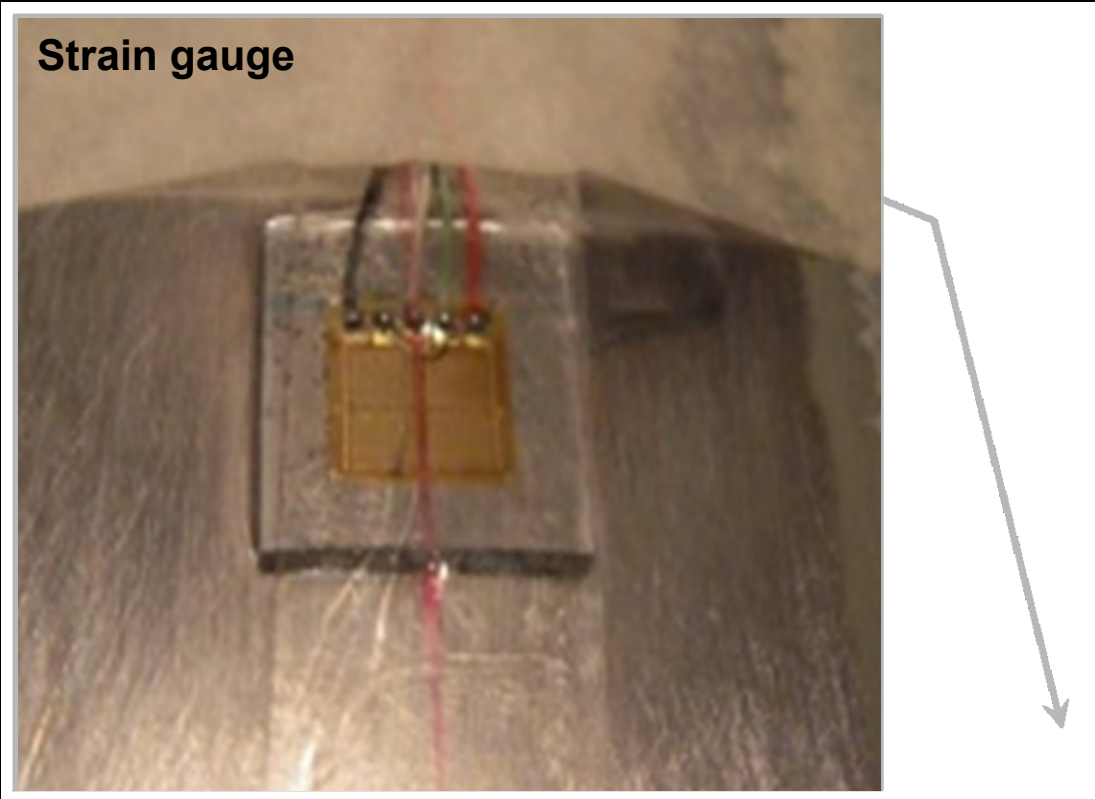




# Measurement system: torque meter




RPM counter




# Measurement system: hydraulic and electric power meter

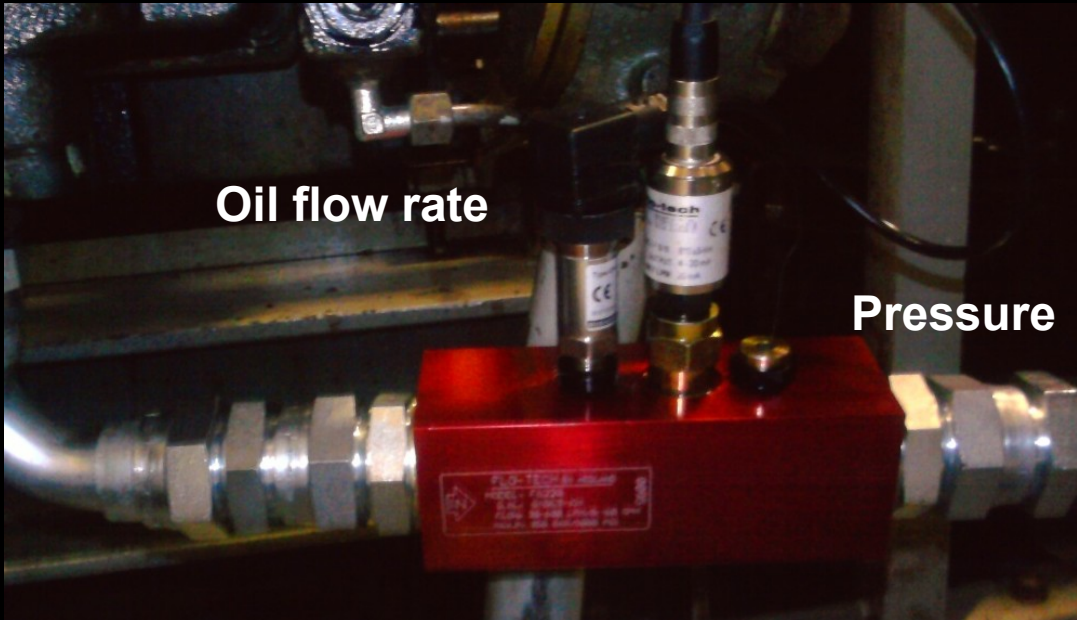

Flow meter and pressure:  
hydraulic power for deck  
machinery

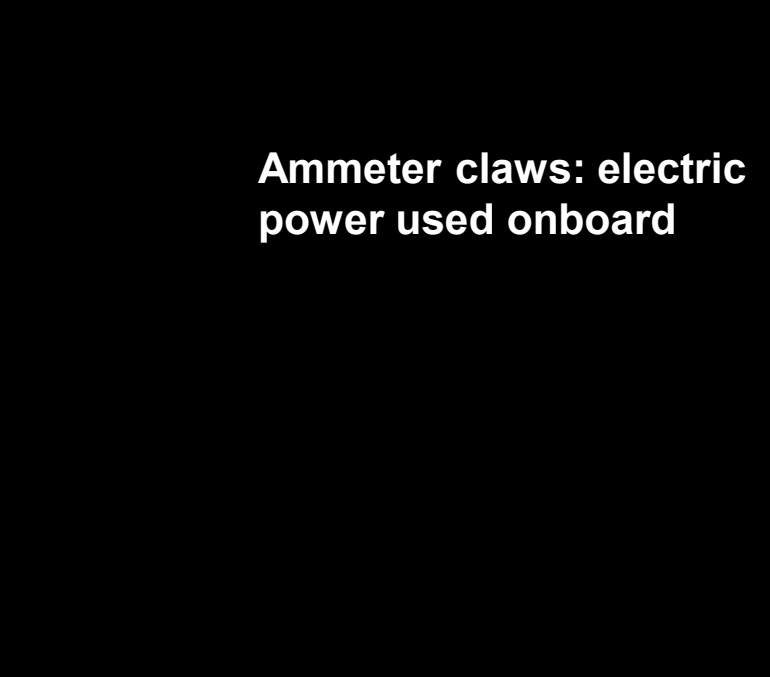

Ammeter claws: electric  
power used onboard

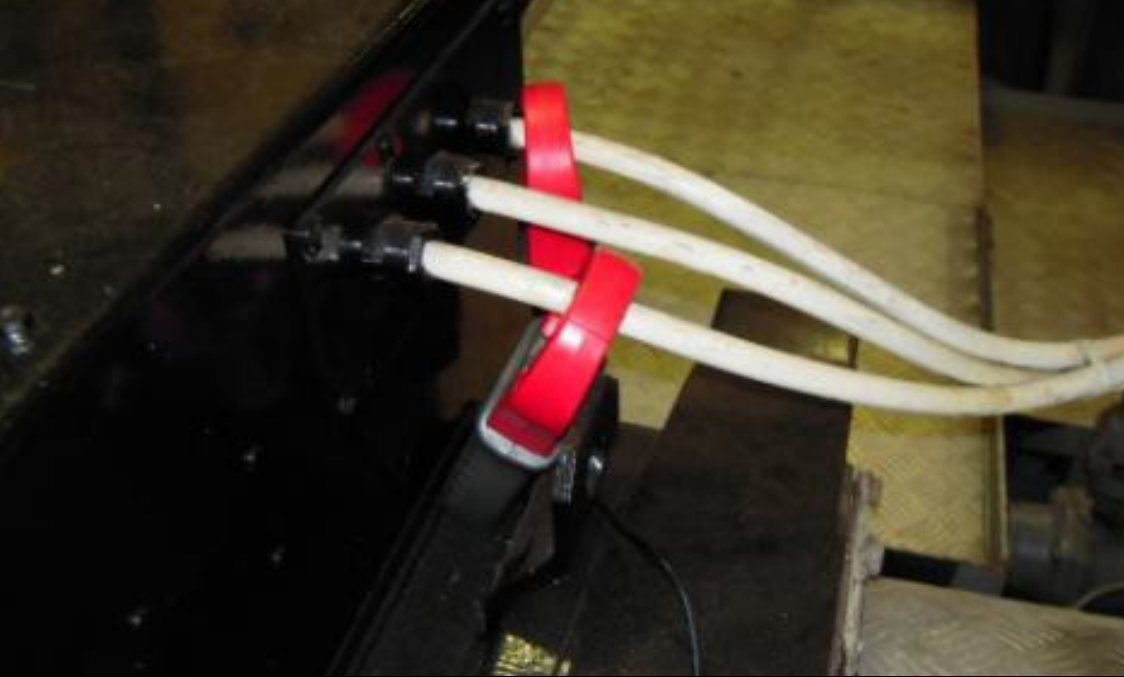


# Measurement system: gear drag sensors



***Mass flow sensors mounted onboard a fishing vessel for the measurement of fuel consumption***



# Multi channel recorder: visualization of the fuel consumption

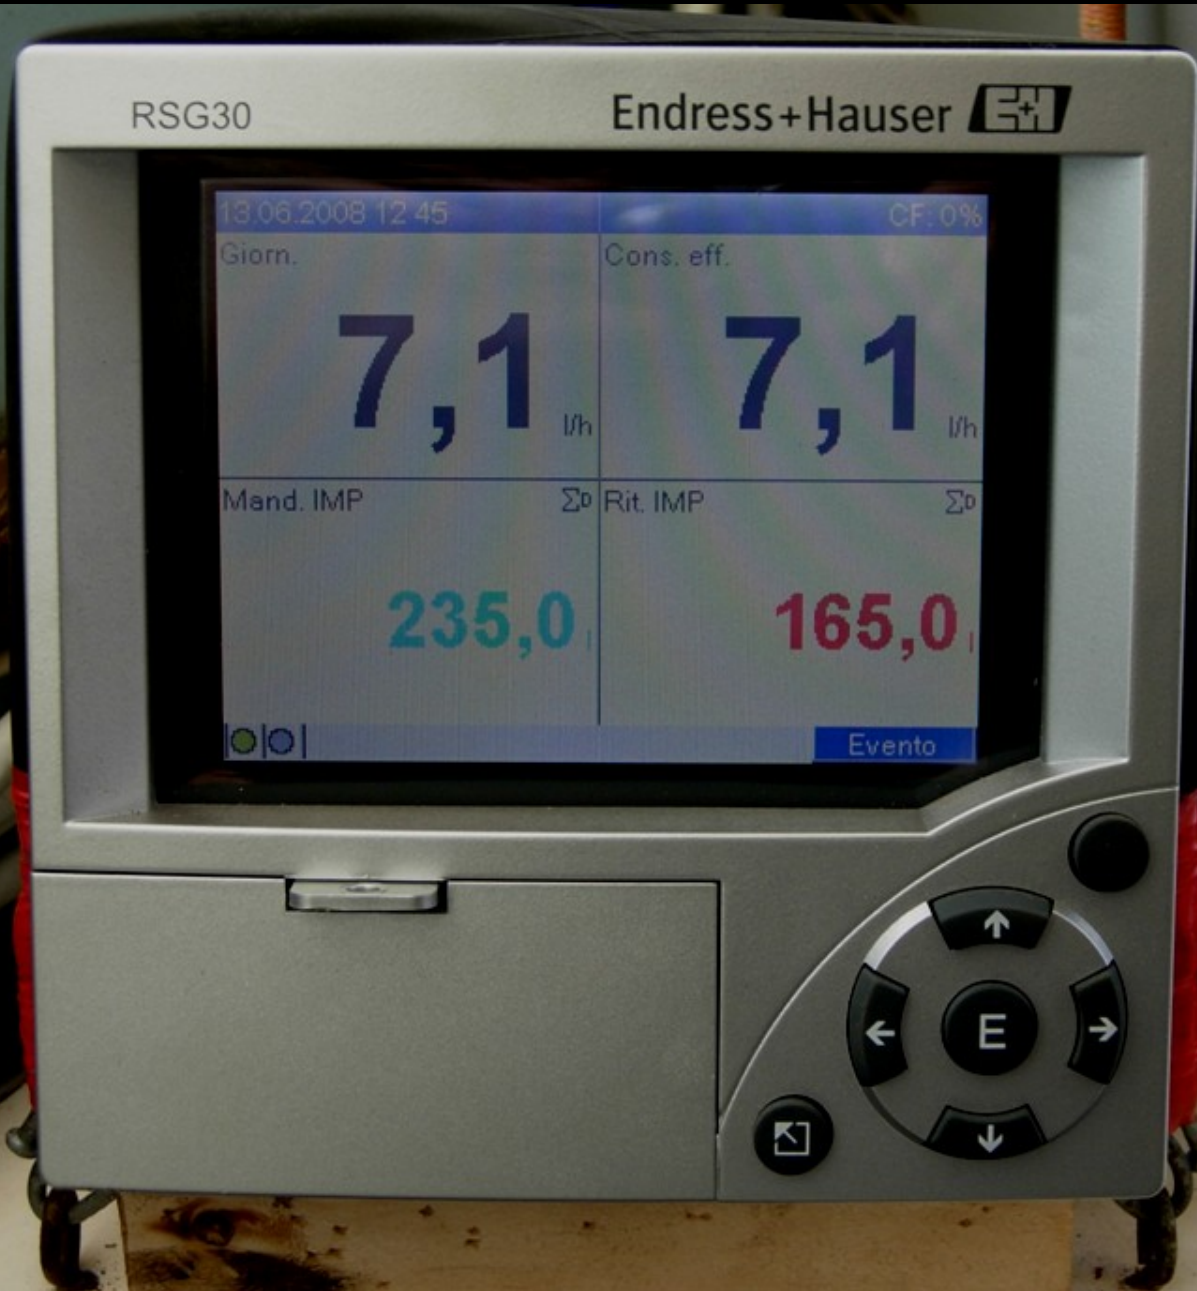



***GPS data logger for the GPS data collection***







## Main characteristics of the vessels monitored

	$L_{OA}$	$L_{PP}$	<b>B</b>	<b>GRT</b>	$P_B$	<b>D</b>
	[m]	[m]	[m]	[GT]	[kW]	[m]
<b>OTB1</b>	21.5	17.0	5.7	82	478	1.78
<b>PTM1</b>	28.6	21.2	6.9	99	940	2.18
<b>OTB2</b>	22.8	19.6	6.2	91	574	1.80
<b>PTM2</b>	29.0	24.3	6.9	138	940	2.20
<b>OTB3</b>	21.5	17.0	5.7	82	478	1.78
<b>PTM3</b>	26.5	21.5	6.8	96	870	2.20
<b>OTB4</b>	22.8	19.6	6.2	91	574	1.80
<b>PTM4</b>	25.5	20.1	6.6	132	772	2.00

**OTB, PTM** *bottom otter trawler; midwater pair trawler*

$L_{OA}$  *length overall*

$L_{PP}$  *length between perpendiculars*

**B** *beam*

**GRT** *international gross tonnage*

$P_B$  *brake power*

**D** *propeller diameter*

## Energy Consumption Indicator (ECI)

$$ECI = \frac{E_T}{P_D \cdot v}$$

$$[ECI] = \frac{[kJ]}{[kW] \cdot [kn]}$$

## Fuel Consumption Indicator (FCI)

$$FCI = \frac{F_C}{P_D \cdot v}$$

$$[FCI] = \frac{[l/h]}{[kW] \cdot [kn]}$$

*By fishing phase (e.g. sailing, trawling)*





$E_T$  Total energy

$F_C$  Total fuel consumption

$P_D$  Power delivered





$v$  Vessel speed

# Results: trawling phase

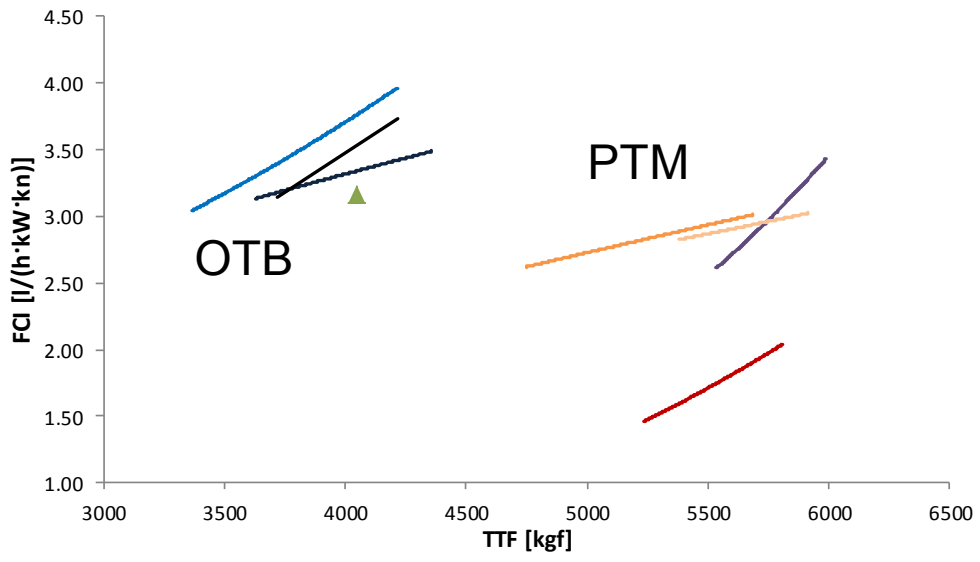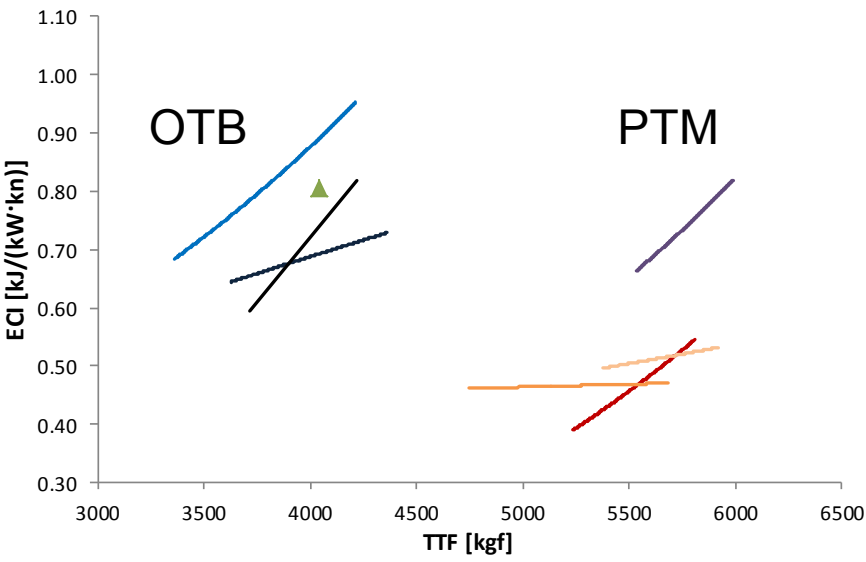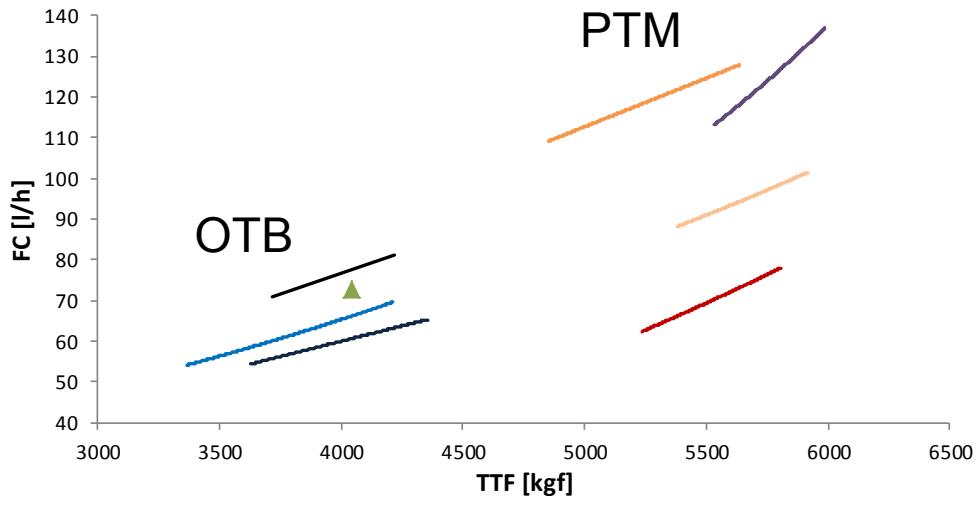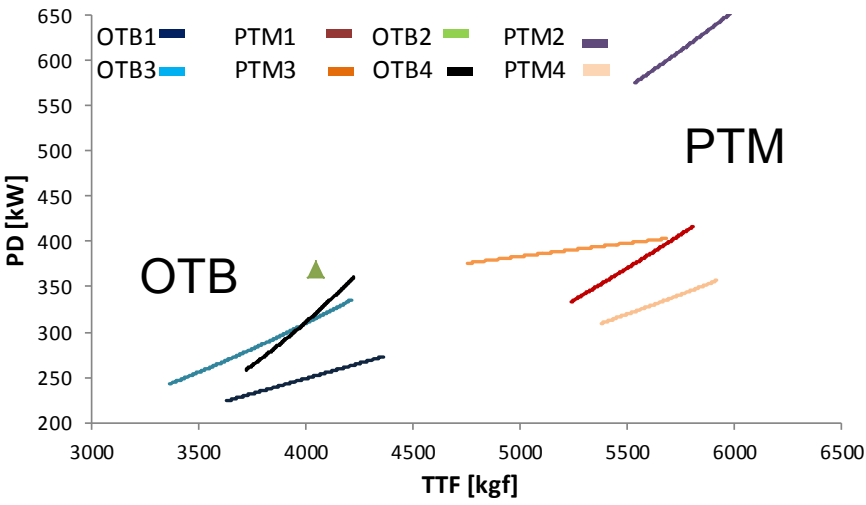

**PD power delivered; FC fuel consumption; TTF total towing force; ECI energy consumption index; FCI fuel consumption index; OTB bottom otter trawler; PTM mid-water pair trawler.**

# Results: sailing phase

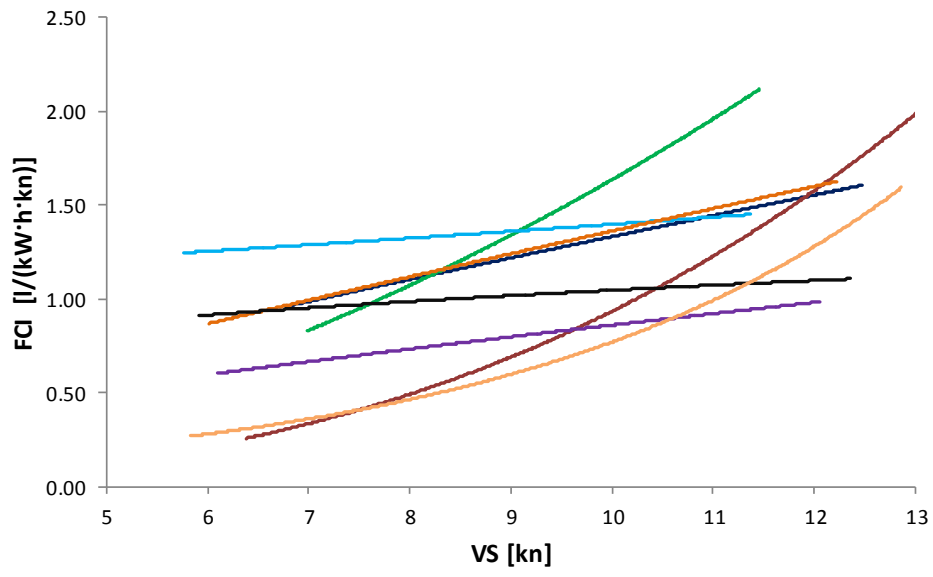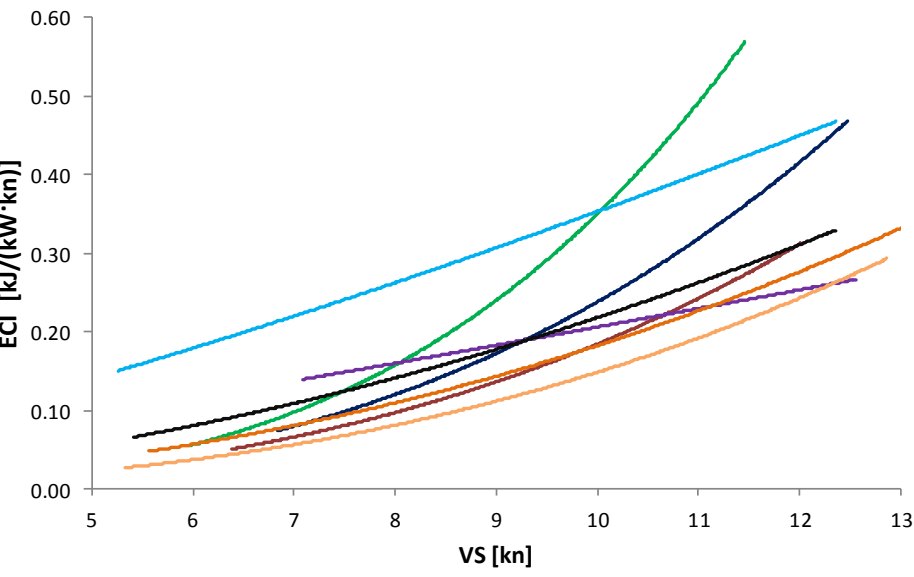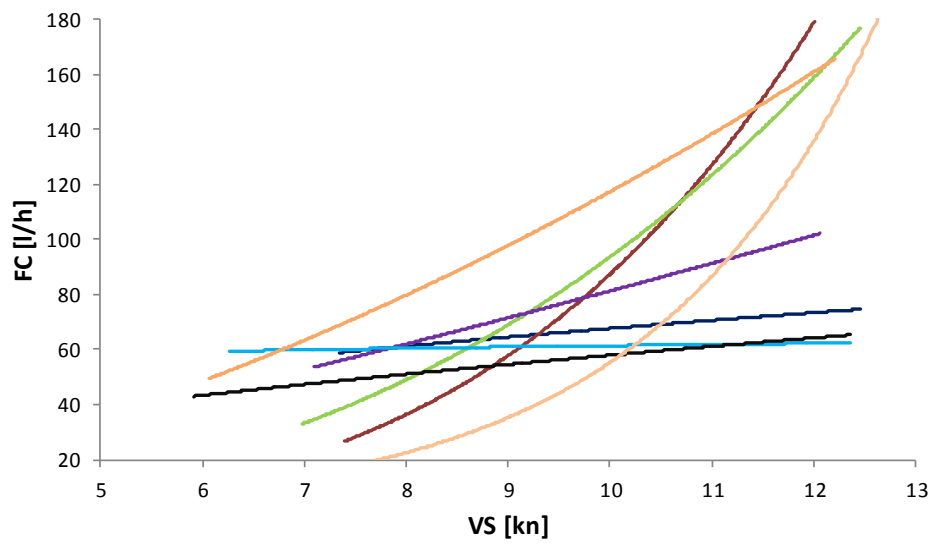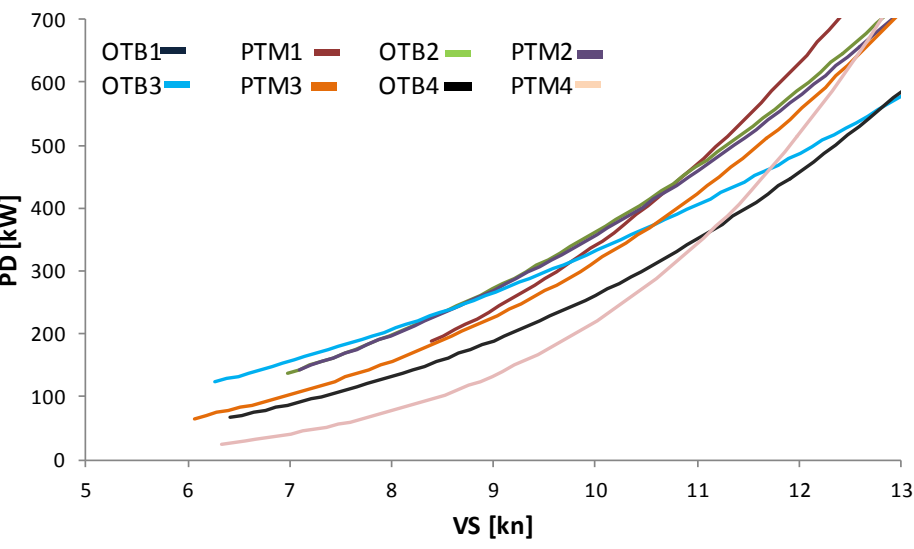

PD power delivered; FC fuel consumption; VS vessel speed; ECI energy consumption index; FCI fuel consumption index; OTB bottom otter trawler; PTM mid-water pair trawler.

# Results: ranking for vessels monitored

ECI of trawling and sailing conditions have been pooled.

PD *power delivered*; FC *fuel consumption*; ECI *energy consumption index*; FCI *fuel consumption index*; OTB *bottom otter trawler*; PTM *mid-water pair trawler*.

	Fishing				Sailing			
	ECI	FCI	ECI/FCI	Rank	ECI	FCI	ECI/FCI	Rank
<b>OTB1</b>	0.69	3.32	0.21		0.22	1.45	0.15	
<b>PTM1</b>	0.47	1.76	0.27		0.20	1.00	0.20	
<b>OTB2</b>	0.81	3.16	0.25		0.32	1.56	0.21	
<b>PTM2</b>	0.74	3.01	0.25		0.21	0.88	0.24	
<b>OTB3</b>	0.83	3.56	0.23		0.28	1.36	0.21	
<b>PTM3</b>	0.47	2.84	0.16		0.16	1.32	0.12	
<b>OTB4</b>	0.71	3.36	0.21		0.15	1.01	0.15	
<b>PTM4</b>	0.52	2.93	0.18		0.15	0.87	0.17	

## Main conclusions

---

- Monitored fishing vessels were not so efficient because of outdated technology. Restrictions on new constructions impose modernizations;
- Energy saving is the key to maintain acceptable and sustainable profitability in fisheries;
- An energy saving strategy is necessary in order to find potential areas of improvements;
- Gains in propulsive efficiency during free navigation might be attained using a controllable pitch instead of a fixed pitch propeller, which can permit an optimum combination of pitch ratio and propeller revolutions for each operating condition;
- In the steaming conditions fuel saving can be obtained by reducing vessel speed;
- Other energy users (hydraulic and electric users) did not show to have noticeably influenced energy consumption, compared to the propulsion system.

# Potential engineering topics

---

- First adaptation: Development of fuel saving bottom trawl
- Second adaptation: Improvement of otterboard design on OTB

# First adaptation: Development of fuel saving bottom trawl

## Traditional trawl

Commonly used in the Italian commercial fishery


## Experimental trawl

Knotted *Rubitech* netting sections in the wings

Wing is a new design → larger vertical opening



Reduction of the wing netting area

Meshes number redistribution

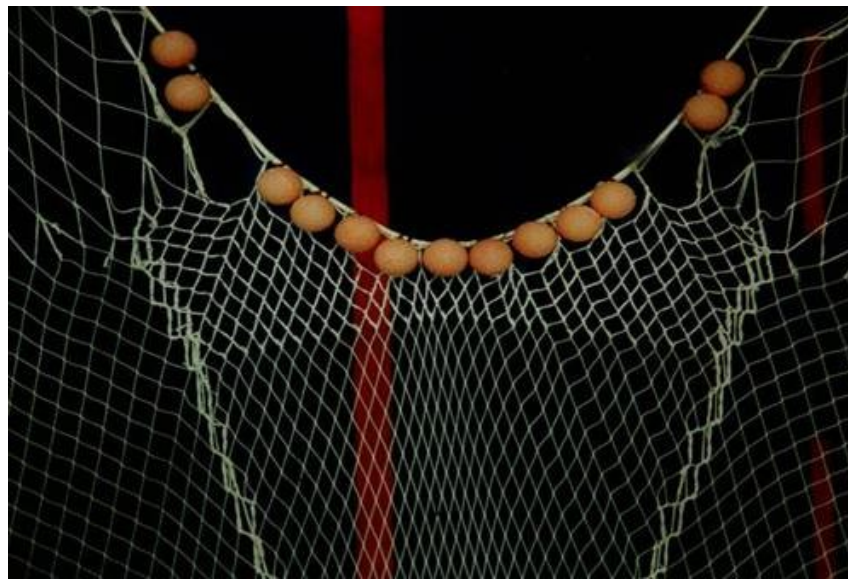



# First adaptation: Development of fuel saving bottom trawl

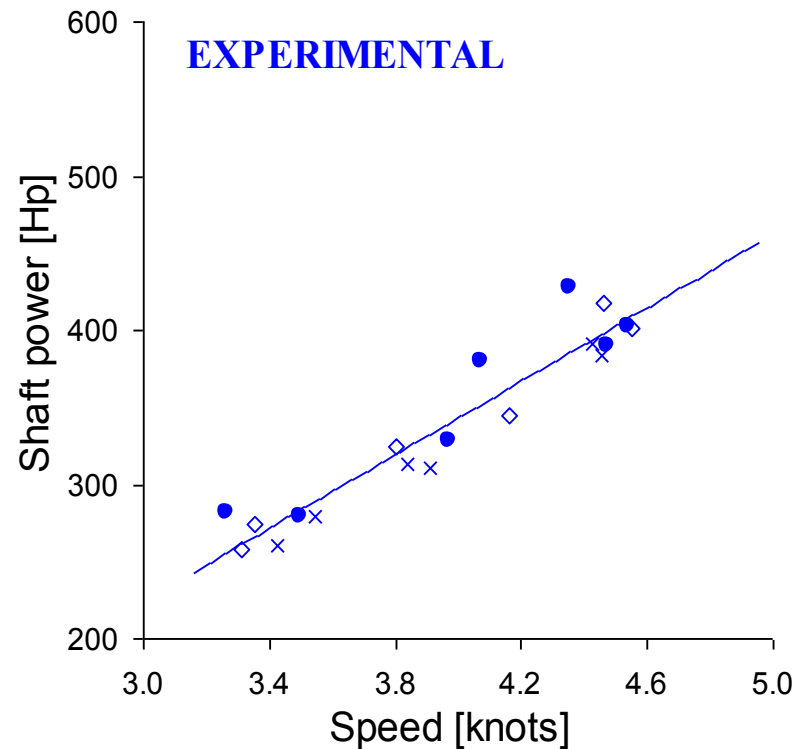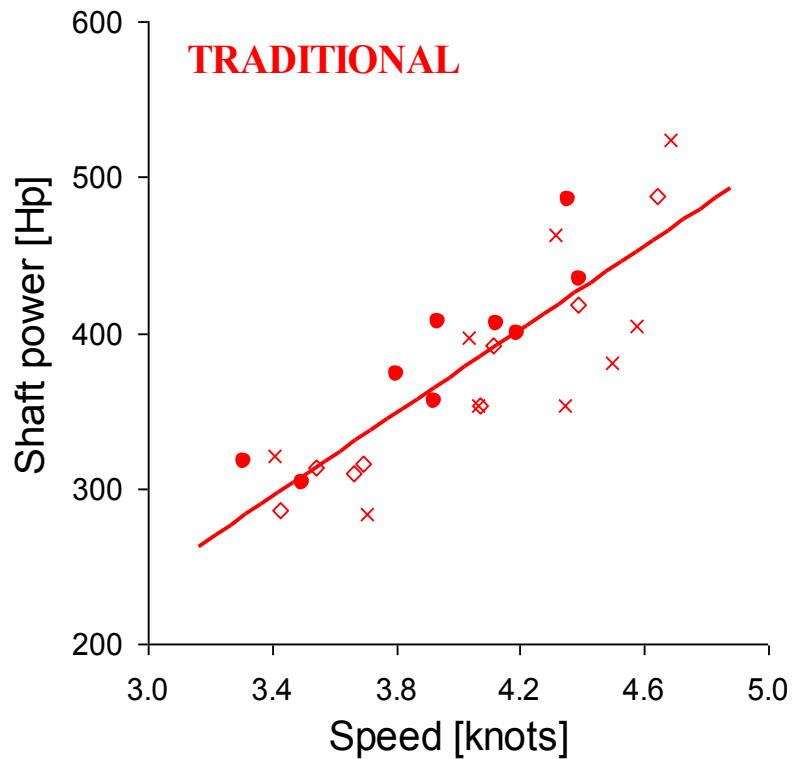

# First adaptation: Development of fuel saving bottom trawl

## Economical analysis

Speed knots	Standard Trawl		Experimental Trawl		Fuel saving
	Power	Fuel consumption	Power	Fuel consumption	
	HP	[l/hour]	HP	[l/hour]	
3.25	274	51.8	254	48.8	2.9
3.50	308	56.6	283	53.1	3.5
3.75	341	61.4	313	57.4	4.0
4.00	376	66.2	343	61.6	4.5
4.25	408	71.0	373	65.9	5.1

### Profile for a vessel of Ancona (Italy)

Days at sea	180
Days fishing	180
Hours fishing per day	16
Hours fishing per year	2880
Fuel cost (Euro/l)	0.40
Towing speed [kn]	4.00


### Gear Investments (Euro)


Traditional trawl	1675
Experimental trawl	2725
<i>Extra investment</i>	<i>1050</i>

### Fuel cost per year (Euro)

Traditional trawl	76262
Experimental trawl	70963
<i>Comparison</i>	<i>5299</i>

# Second adaptation: Improvement of otterboard design in OTB

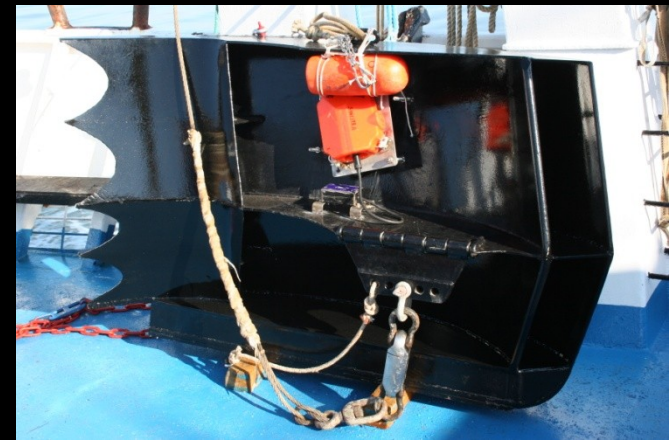

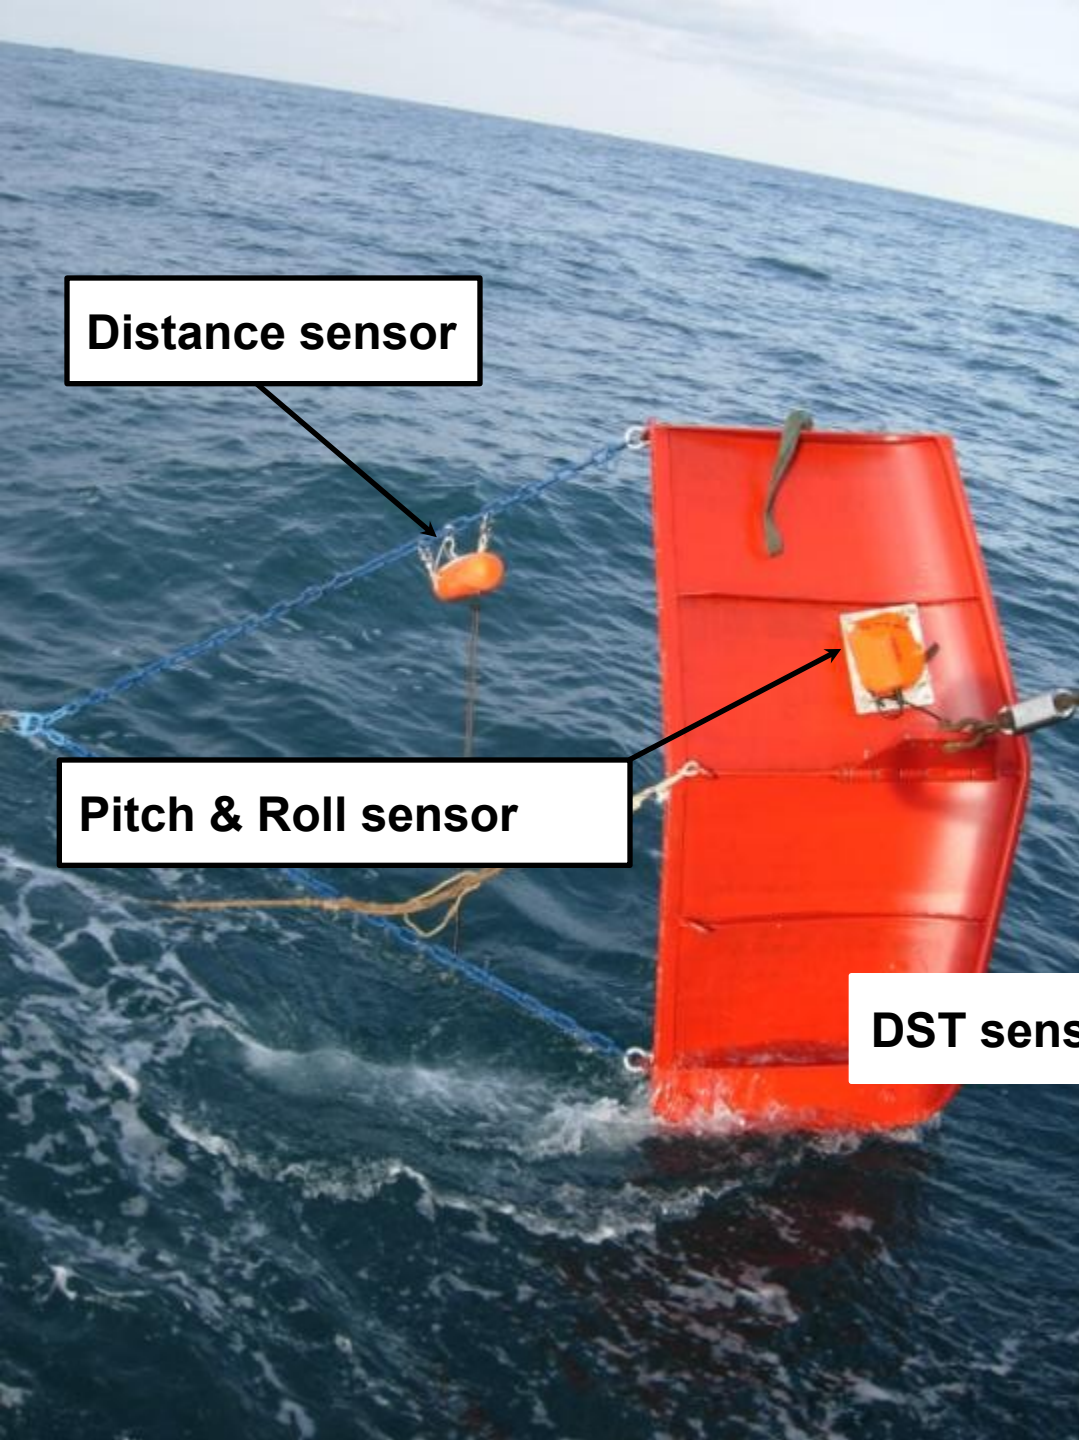

**Distance sensor**

**Pitch & Roll sensor**




**DST sensor**



**Tension sensor**

**DST sensor**

# Comparison between the traditional VEE (VEE) and the Thyboron type VF15 (VF15) otterboard

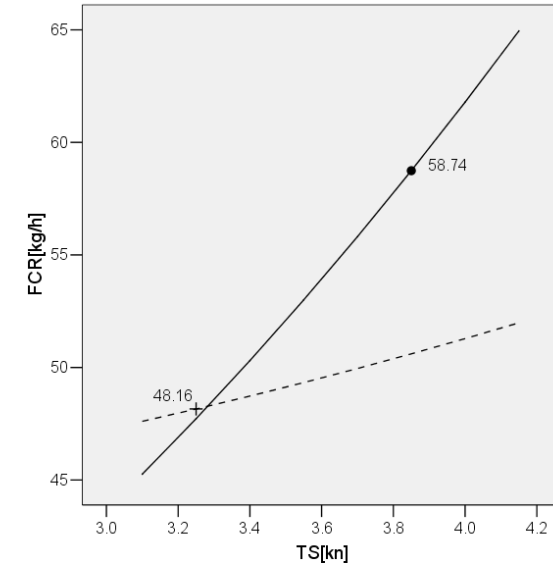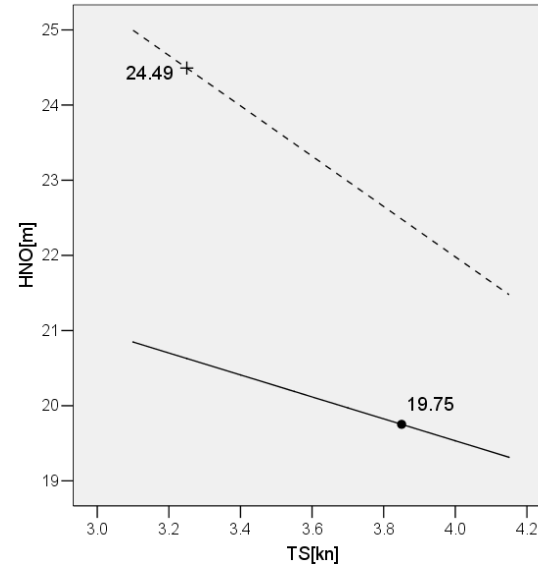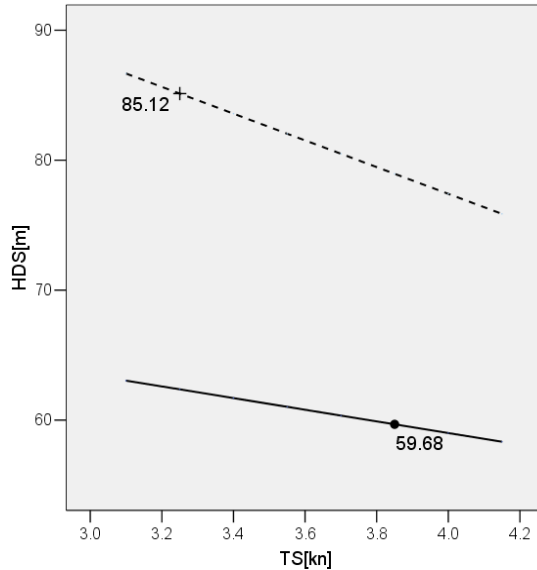

Test comparison between the traditional VEE otterboard (circle points and continuous line) and the Thyboron type VF15 otterboard (cross points and dotted lines). HDS[m]: horizontal door spread; HNO[m]: horizontal net opening; FCR[kg/h]: fuel consumption rate; TS[kn]: towing speed. Values at TS of 3.25 and 3.85 kn were reported for the VF15 and the VEE otterboard respectively.

## Comparison between the traditional VEE (VEE) and the Thyboron type VF15 (VF15) otterboard

Parameter		VEE	VF15	Diff.	Diff%
TS	[kn]	3.85	3.25	-0.60	-15.6%
HDS	[m]	61.13	86.57	25.45	41.6%
HNO	[m]	19.88	24.61	4.74	23.8%
VNO	[m]	1.67	1.70	0.03	1.6%
FCR	[kg/h]	58.74	48.16	-10.59	-18.0%
AEH	[1000m <sup>2</sup> ]	141.72	148.15	6.43	4.5%
FCH	[kg/1000m <sup>2</sup> ]	0.41	0.33	-0.09	-21.6%

Mean value of horizontal door spread (HDS); horizontal net opening (HNO); fuel consumption rate (FCR); vertical net opening (VNO); towing speed (TS); area explored in 1-hour-haul (AEH); fuel consumption per area explored (FCH).

## Catch comparison between the traditional VEE (VEE) and the Thyboron type VF15 (VF15) otterboard

<b>Door</b>	<b>COM</b> [kg/h]	<b>DEB</b> [kg/h]	<b>DIS</b> [kg/h]	<b>FC</b> [kg/h]	<b>COM</b> [kg fish / kg fuel]
<b>VEE</b>	12.98	3.15	25.98	58.74	0.22
<b>VF15</b>	12.33	3.42	16.05	48.16	0.26
<b>Diff.</b>	-0.65	0.27	-9.93	-10.59	0.04
<b><i>Sig. p</i></b>	<i>0.883</i>	<i>0.916</i>	<i>0.303</i>		

COM: total commercial catch per hour;

DEB: total debris per hour;

DIS: total discards catch per hour.

# Economic analysis

Fishing operation	Day							Total	
	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Weekly	Yearly
Steaming to and from fishing grounds	2	2	1	1	0	0	0	6	282
Shooting and hauling gears	4	4	4	2	0	0	0	14	658
Fishing	15	15	16	7	0	0	0	53	2491
Searching	0	0	0	0	0	0	0	0	0
Time in harbour during Working weeks	3	3	3	14	24	24	24	95	4465
<b>Total</b>	<b>24</b>	<b>24</b>	<b>24</b>	<b>24</b>	<b>24</b>	<b>24</b>	<b>24</b>	<b>168</b>	<b>7896</b>

## Profile for a vessel of Ancona (Italy)

Working hours/week	168
Closed weeks per year	5
Trawling hours/year	2491
Fuel cost (EUR/l)	0.60

<b>Door investement</b>	EUR
VEE	3,500
VF15	7,000
<i>Extra Investement</i>	3,500

## Fuel cost per year

VEE	70,238
VF15	57,580
<i>Comparison</i>	12,658



## **Conclusions**

**The VF15 otterboard produced horizontal openings much greater than those obtained with the VEE otterboard, but with less fuel demands.**

**The greater horizontal openings obtained with the VF15 have surely increased the net drag, therefore improvements of around 18% in the fuel saving, due to the change of the door, might have been underestimated.**

**Monitoring the height of the otterboards above the bottom has required appropriate acoustic instruments which have been used to adjust the door height by altering the towing speed and the trawl warp length.**

**The investment for two VF15 otterboards, including all the rigging components (weight, backstrops chains, etc.) is estimated at around 7.0 KEUR. A lower investment of 3.5 KEUR is required for the VEE otterboards.**

**Assuming that the catching power is equal for the two doors, the payback time for the new door investment will be less than 4 months.**

***It is not the strongest of the species that survive,  
nor the most intelligent, but the one most  
responsive to change.***

*- Charles Darwin -*